



24/7 Colorful Imaging


Full-color Network Camera




Products

Full-color




NightHawk			
	SN-IPR8540HDAW		SN-IPR8540DQAW
	<ul style="list-style-type: none"> • 4 MP, 1/1.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC • 40 m warm light • True WDR 		<ul style="list-style-type: none"> • 4 MP, 1/1.8" CMOS • F1.0 • 4.5 to 8/8 to 32 mm • P-iris • 40 to 60 m warm light • True WDR

Ultra				
				
SN-IPR8041HCAW	SN-IPR8081HDAW SN-IPR8041HDAW	SN-IPR8081CQAW SN-IPR8041CQAW	SN-IPR8081CBAW SN-IPR8041CBAW	SN-IPR8081DQAW SN-IPR8041DQAW
<ul style="list-style-type: none"> • 4 MP, 1/1.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC • 30 m warm light • True WDR 	<ul style="list-style-type: none"> • 4 MP/8 MP, 1/1.8" CMOS • F1.0 • 4 mm • Built-in MIC • 30 m warm light • True WDR 	<ul style="list-style-type: none"> • 4 MP/8 MP, 1/1.8" CMOS • F1.0 • 4 mm • Built-in MIC and speaker • 30 m warm light • True WDR 	<ul style="list-style-type: none"> • 4 MP/8 MP, 1/1.8" CMOS • F1.0 • 4 mm • Built-in MIC and speaker • 30 m warm light • True WDR 	<ul style="list-style-type: none"> • 4 MP/8 MP, 1/1.8" CMOS • F1.0 • 4 mm • Built-in MIC and speaker • 40 m warm light • True WDR

Pro			
			
SN-IPR8080HCAW SN-IPR8050HCAW	SN-IPR8080CQAW SN-IPR8050CQAW	SN-IPR8050CBAW SN-IPR8020CBAW	SN-IPR8080DQAW SN-IPR8050DQAW
<ul style="list-style-type: none"> • 5 MP/8 MP, 1/2.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC • 30 m warm light • True WDR 	<ul style="list-style-type: none"> • 5 MP/8 MP, 1/2.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC and speaker • 30 m warm light • True WDR 	<ul style="list-style-type: none"> • 2 MP/5 MP, 1/2.8" CMOS • F1.0 • 4 mm • Built-in MIC and speaker • 30 m warm light • True WDR 	<ul style="list-style-type: none"> • 5 MP/8 MP, 1/2.8" CMOS • F1.0 • 4 mm • Built-in MIC and speaker • 40 m warm light • True WDR

Lite	
	SN-IPR5180HZBW <ul style="list-style-type: none"> • 8 MP, 1/2.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC • 30 m warm light

Dual Light Full-color

Speed Dome		180° Panoramic	
	SN-IPS8641YDS-Z30 <ul style="list-style-type: none"> • 4 MP, 1/1.8" CMOS • 30 X, 7 to 210 mm • IR: 250 m(820 ft) • warm light: 60 m(200 ft) • Built-in MIC and speaker 		SN-IPS8654ZDC-Z5 SN-IPS8654ZDS-Z5 <ul style="list-style-type: none"> • 5 MP, 1/2.7" CMOS • 5 X, 2.7 to 13.5 mm • IR: 50 m(160 ft) • warm light: 30 m(100 ft) • Built-in MIC and speaker
			SN-IPP8085QAS <ul style="list-style-type: none"> • 2x 5MP 1/2.8" CMOS • 2.8 mm • Built-in MIC and speaker • 30 m IR, 20 m warm light • True WDR

Ultra		
		
SN-IPR8041CQAS <ul style="list-style-type: none"> • 4 MP, 1/1.8" CMOS • 2.8/4 mm • Built-in MIC and speaker • 40 m IR, 30 m warm light • True WDR 	SN-IPR8041CBAS <ul style="list-style-type: none"> • 4 MP, 1/1.8" CMOS • 4 mm • Built-in MIC and speaker • 40 m IR, 30 m warm light • True WDR 	SN-IPR8041DQAS <ul style="list-style-type: none"> • 4 MP, 1/1.8" CMOS • 4 mm • Built-in MIC and speaker • 50 m IR, 40 m warm light • True WDR

Pro			
			
SN-IPR8080CQAS SN-IPR8050CQAS <ul style="list-style-type: none"> • 5 MP/8 MP, 1/2.8" CMOS • 4 mm • Built-in MIC and speaker • 40 m IR, 30 m warm light • True WDR 	SN-IPR8050CBAS SN-IPR8020CBAS <ul style="list-style-type: none"> • 2 MP/5 MP, 1/2.8" CMOS • 4 mm • Built-in MIC and speaker • 40 m IR, 30 m warm light • True WDR 	SN-IPR8080DKAS <ul style="list-style-type: none"> • 8 MP, 1/2.8" CMOS • 2.8 mm • Built-in MIC • 40 m IR, 30 m warm light • True WDR 	SN-IPR8080DQAW SN-IPR8050DQAW <ul style="list-style-type: none"> • 5 MP/8 MP, 1/2.8" CMOS • 4 mm • Built-in MIC and speaker • 50 m IR, 40 m warm light • True WDR

Eco	Lite		
			
SN-IPV7180HCAS SN-IPV7150HCAS <ul style="list-style-type: none"> • 5 MP/8 MP, 1/2.7" CMOS • 2.8/4 mm • Built-in MIC • 30 m IR, 30 m warm light • True WDR 	SN-IPR5180HZBS SN-IPR5150HZBS <ul style="list-style-type: none"> • 5 MP/8 MP • 2.8/4 mm • Built-in MIC • 30 m IR, 30 m warm light 		SN-IPR5150HBAS <ul style="list-style-type: none"> • 5 MP, 1/3" CMOS • 2.8/4 mm • Built-in MIC and speaker • 30 m IR, 30 m warm light

Key Features




24/7 Colorful Imaging

F1.0 aperture has better imaging effect in low light



AI-ISP

Subvert Tradition, Computational Power Exchange Image

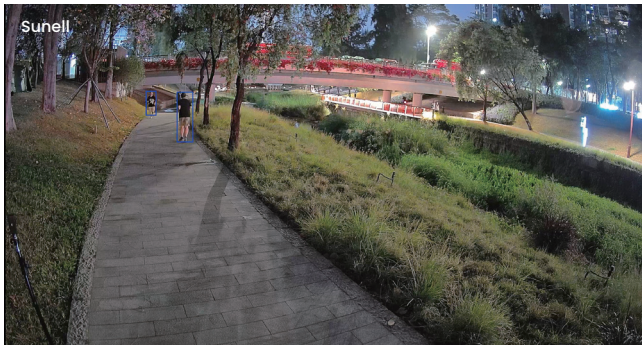

Energy Saving

Minimizing the Dependence on Supplementary Lighting



Shenzhen Sunell Technology Corporation

📍 22-23F, Building 2, Chongwen Park, Nanshan Zhiyuan (Phase 3), No. 3370 Liuxian Avenue, Nanshan District, Shenzhen 518052

☎ +86(755) 2675 4336 📠 +86(755) 8602 6152 ✉ sales@sunellsecurity.com

©2024 Shenzhen Sunell Technology Corporation. All rights reserved.

The specifications and descriptions of products and services contained in this catalogue were correct at the time of publishing. Inner Range reserves the right to change specifications or withdraw products without notice.