



# SN-ADR3916E2

16CH 4K 2HDD Hybrid DVR





## Key Features

- Supports AHD, TVI, CVI, CVBS, IP video inputs
- Max 24-ch IP camera inputs, each channel up to 8MP
- Up to 4K resolution for recording
- Support HDMI and VGA output
- Smart search and playback
- Support multiple languages
- Easy to use same Interface of GUI/WEB

# Specification

Video and Audio	
Analog Video Input	16-ch BNC
AHD Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
TVI Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
CVI Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
CVBS Input	PAL/NTSC
IP Video Input	16+8, each channel up to 8MP
Audio In/Out	4/1
Two-way Talk	N/A
HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
VGA Output	1920×1080, 1280×1024, 1024×768
CVBS Output	N/A
Synchronous Playback	24/16/9/4/1
Recording	
Encoding Resolution	8MP, 5MP, 4MP, 1080P, 720P, 960H, D1, CIF
Frame Rate	8MP@7fps, 5MP@12fps, 4MP@15fps, 1080P@25/30fps
Video Bit Rate	Main stream: 128Kbps~ 6144Kbps, Sub stream: 16Kbps~1024Kbps
Dual Stream	Support
Network	
Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
Protocols	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Remote Users	4
Hard Disk	
SATA	2 SATA interfaces
Capacity	Up to 8TB capacity for each disk
Interface	
Alarm In/Out	8/1
RS485	Support
USB Interface	3 ports (USB 2.0 x 2)
General	
Power Supply	DC12V/4A
Power Consumption	Max 15W (without HDD)
Working Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Working Humidity	Less than 90% RH
Dimensions (W×D×H)	350 x 305 x 49 mm (13.78 × 12.01 × 1.93 inch)
Net Weight	1.8 kg (3.97 lb)

## Dimensions (mm)

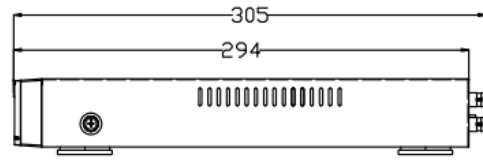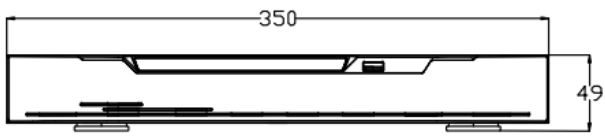

## Rear Panel